


SPECIFICATIONS

MOTORCYCLE BATTERIES

(MOTUMX262C3, 6N2A-2C-3) Conventional

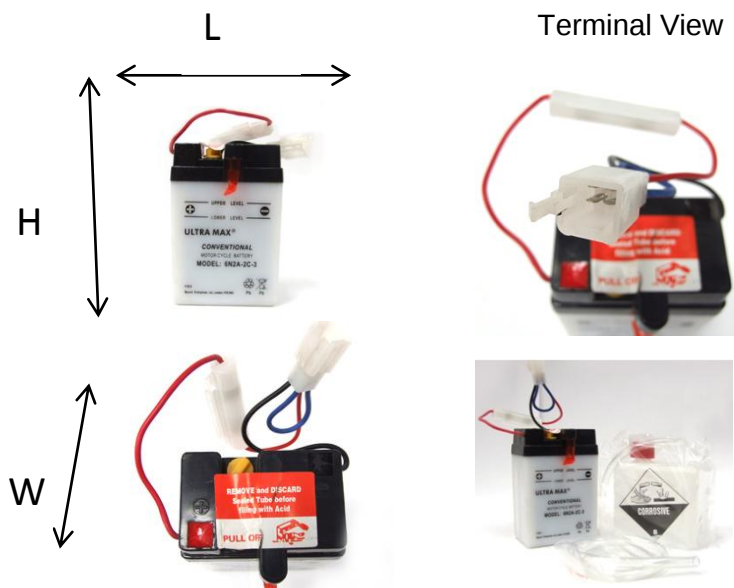

Ultramax Conventional Motorcycle Batteries construction produces extra protection against corrosion, withstand environment vibration and delivers high cranking power.

Capacity (Ah/10HR)	2
Dimensions (±2mm)	
L	70
H	46
W	103
Weight w/o Acid (kg)	0.42
Acid Volumn (liter)	0.15
Charge Current (Amp.)	0.20
Assembly Figure	
Terminal Type	-
CCA @-18°C	20